


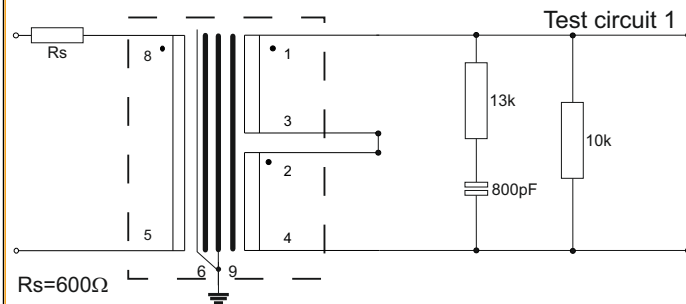

Specification (test circuit 1):
Turns ratio: 1 to 1 (series wired)

DC resistance (Ω +/- 15%)
Primary (8 - 5): 485
Secondary (series) (1 - 4): 485

Input impedance (Ω): 10.7k Ω (typ.) @ 1kHz
Output impedance (Ω): 1.56k Ω (typ.) @ 1kHz, 600R load


Voltage gain @ 1kHz, -1.4dBu (typ.)

Maximum input @ 20Hz, <1% THD: 13dBu
@ 50Hz: <0.5% THD: 21dBu

Insertion loss: 0.8dB (typ.)

Leakage inductance @ 1kHz (8 - 5) (1/2/3/4 S/C): 14mH (typ.)

Capacitance @ 10kHz, 0.1V:
Cp - s: 68pF (typ.) or 4pF (typ.) with screen earthed
Cp - scr: 148pF (typ.)
Cs1+2 - scr: 124pF (typ.)

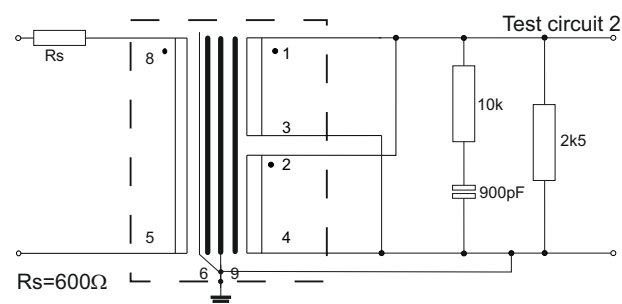

Specification (test circuit 2):
Turns ratio: 2 to 1 (parallel wired)

DC resistance (Ω +/- 15%)
Primary (8 - 5): 485
Secondary (parallel) ((1+2) - (3+4)): 120

Input impedance (Ω): 10.7k Ω (typ.) @ 1kHz
Output impedance (Ω): 2.68k Ω (typ.) @ 1kHz, 600R load



Voltage gain @ 1kHz, -7.3dBu (typ.)

Maximum input @ 20Hz, <1% THD: 13dBu
@ 50Hz, <0.5% THD: 21dBu

Insertion loss: 0.8dB (typ.)

Leakage inductance @ 1kHz: (8 - 5) (1/2/3/4 S/C) 14mH (typ.)

Capacitance @ 10kHz, 0.1V:
Cp - s: 68pF (typ.) or 4pF (typ.) with screen earthed
Cp - scr: 148pF (typ.)
Cs1+2 - scr: 124pF (typ.)

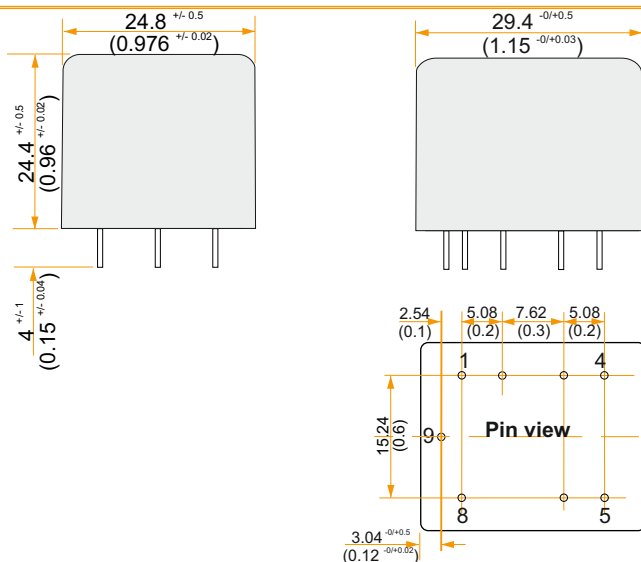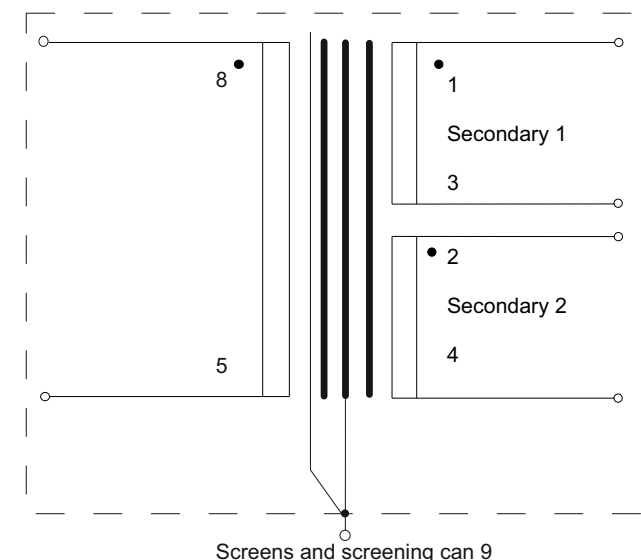

Pin diameter 0.7mm (0.0276)

Tolerance on dimensions in mm: +/- 0.1 unless stated otherwise.
Inches shown in brackets.

Tolerance on dimensions in inches: +/- 0.005" unless stated otherwise.

Application:
Line input transformer

Input 21dBu max. (@ 50Hz) <0.5%THD

Frequency response +/-0.25dB (16Hz - 60kHz)

Hi-pot, primary to secondaries: 500VDC
Windings to screens+can: 500VDC

Fitted with multiple electrostatic screens

Low distortion Mu-metal core

Mu-metal screening can reduces electrical noise by up to 30dB

Operating temperature range: 0 to +70°C
Storage temperature range: -25°C to +120°C

Mass = 0.055kg



vigortronix

VIGORTRONIX LTD
16 De Havilland Way
Windrush Park, Witney
Oxon, OX29 0YG, UK
Tel: +44 (0)1993 777570
Fax: +44 (0)1993 777580


www.vigortronix.com



Scale: nts

DESCRIPTION





Line input transformer
10k to 2k5 / 10k
page 1 of 2



Third Angle Projection

All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	09/06/25	CS		VTX-LIN4

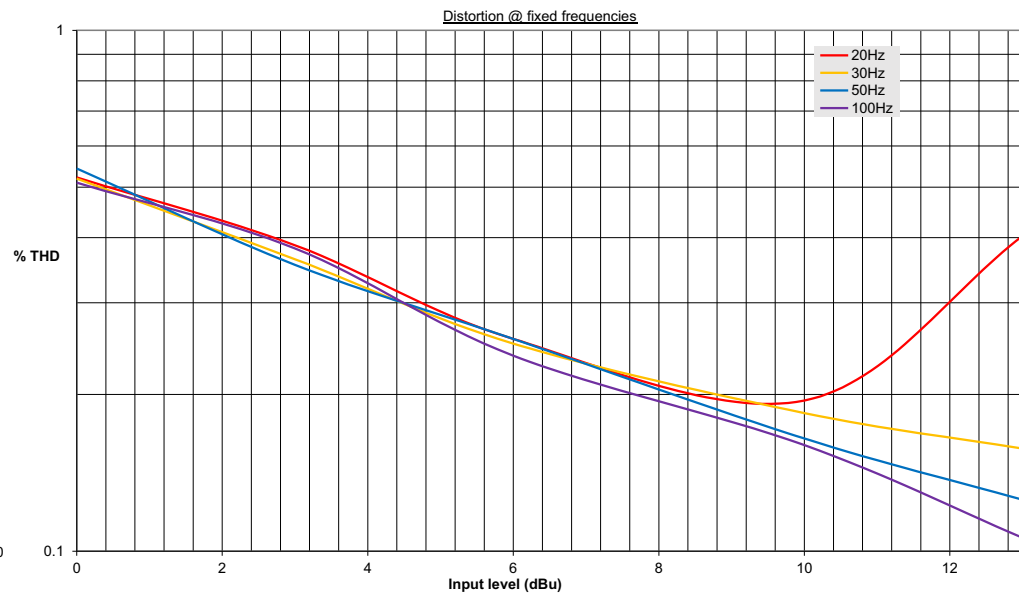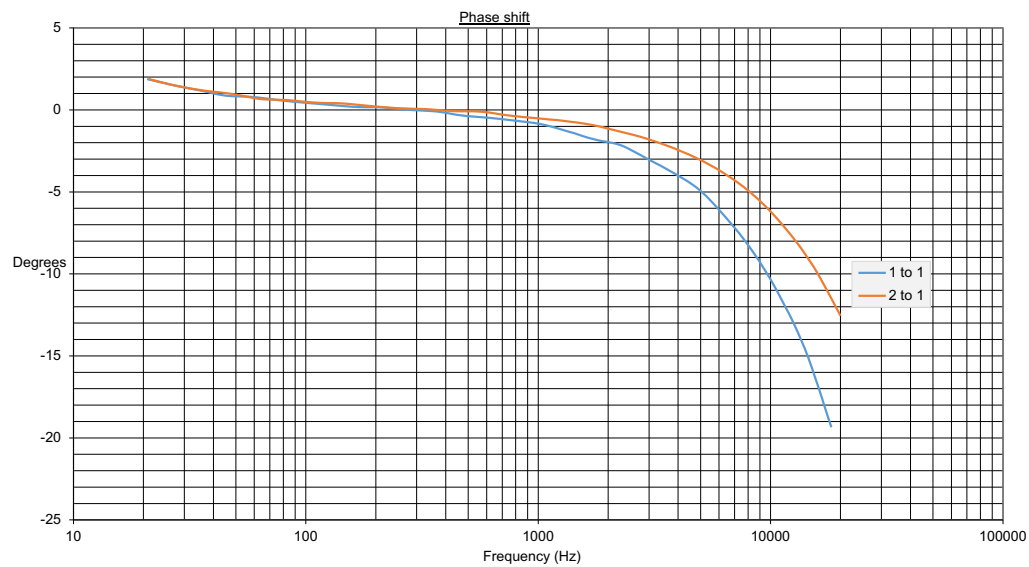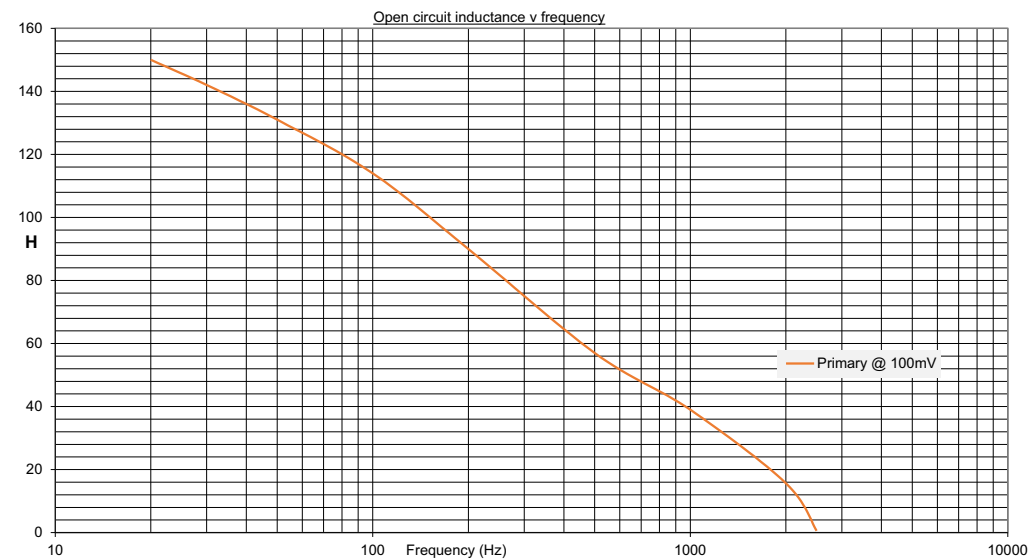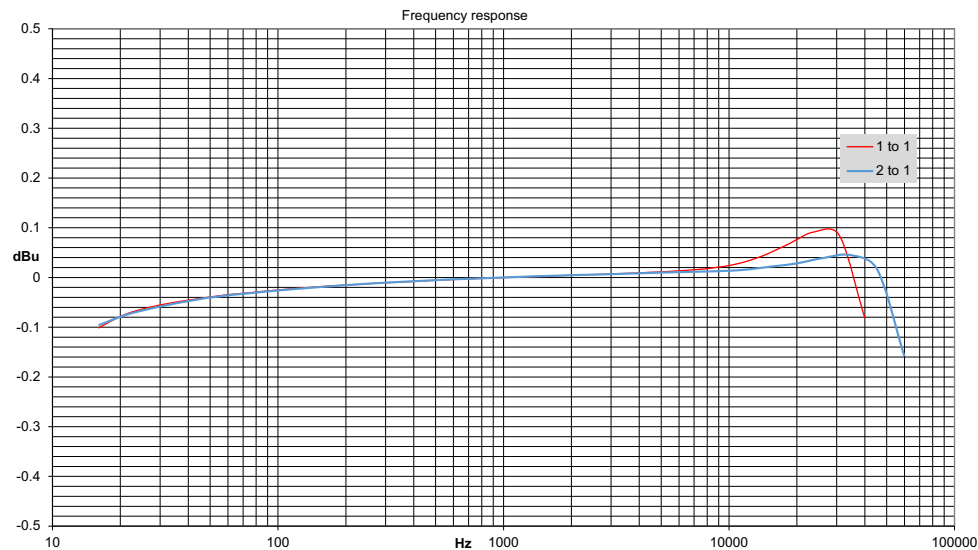

vigortronix

VIGORTRONIX LTD
16 De Havilland Way
Windrush Park, Witney
Oxon, OX29 0YG, UK
Tel: +44 (0)1993 777570
Fax: +44 (0)1993 777580
www.vigortronix.com

DESCRIPTION

Line input transformer
10k to 2k5 / 10k
page 1 of 2

Scale: nts

All dimensions in mm unless stated otherwise

ISSUE	DATE	DRAWN	CHECKED	DRAWING NUMBER
1	09/06/25	CS		VTX-LIN4